




INNOVATION WORKING FOR YOU

RR96

**Roto-Rake
Operator and Parts Manual**

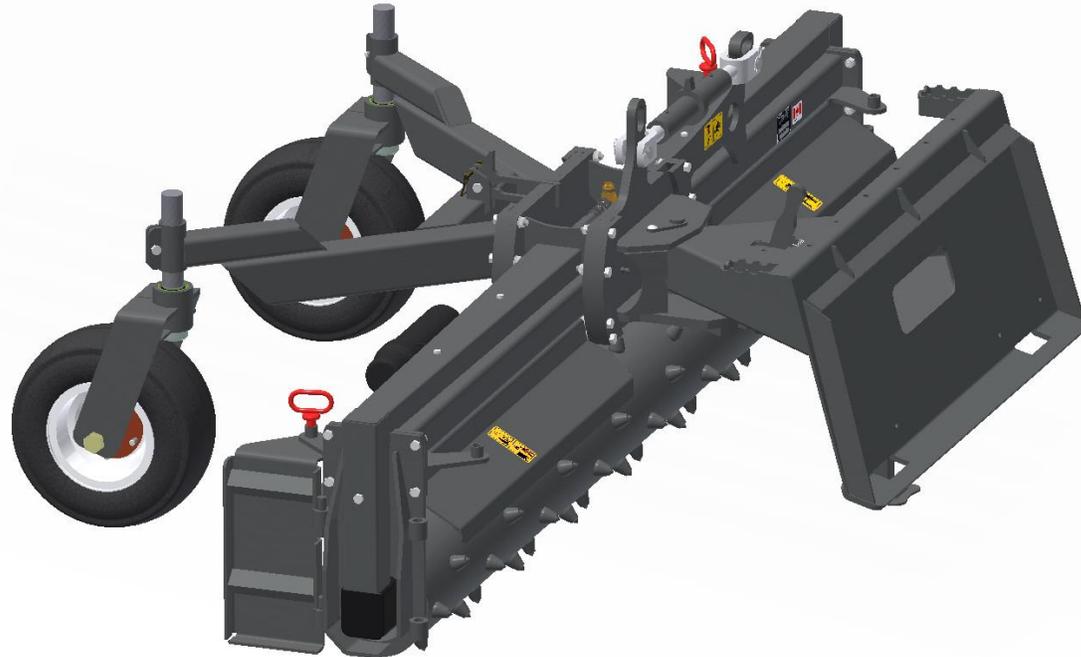

REIST Industries Inc.
100 Union Street
Elmira, Ontario, Canada
N3B 3L7

Phone: 519-669-1501
Toll Free: 1-877-467-3478
www.reistindustries.com

Effective Serial Number Y4401

Contents

INTRODUCTION.....	2
PRODUCT CONFIGURATION	3
GENERAL SAFETY PRECAUTIONS	4
GENERAL SAFETY PRECAUTIONS	5
OPERATION AND TRANSPORTATION ON PUBLIC ROADS AND AREAS	6
SAFETY DECALS	7
SAFETY DECALS . . . cont'd	8
MAINTENANCE	8
STANDARD SETUP INSTRUCTIONS.....	9
SKID-STEER HOOKUP INSTRUCTIONS	9
OPERATION OF ROTO-RAKE	9
FLOAT SETUP INSTRUCTIONS	10
FLOAT SETUP OF ROTO-RAKE.....	10
STANDARD FEATURES ASSEMBLY	11
RR96 ROTO RAKE - ASSEMBLY.....	12
RR96 WHEEL ASSEMBLY	13
STANDARD 15 DEGREE SWIVEL FRAME ASSEMBLY	14
BASE UNIT & HITCH ASSEMBLY.....	15
OPTIONAL ON THE FLY HYDRAULIC VALVE BLOCK.....	16
OPTIONAL HYDRAULIC VALVE BLOCK DETAILS	17
OPTIONAL HYDRAULIC VALVE BLOCK DETAILS	18
OPTIONAL VALVE BLOCK WIRING HARNESSSES	19
OPTIONAL DIVERTOR VALVE	20
OPTIONAL DIVERTOR VALVE ASSEMBLY DETAILS	21
OPTIONAL DIVERTOR VALVE DETAILS & SCHEMATIC	22
WIRING HARNESSSES.....	23
OPTIONAL SIDE CUTTERS - RRSCK	24
OPTIONAL PLOW ATTACHMENT ASSEMBLY	25
WARRANTY INFORMATION.....	26

Record your product information for future reference:

Model Number: _____

Serial Number: _____

In Service Date: _____

Sold By: _____

INTRODUCTION

Thank you for choosing the REIST RR96 ROTO-RAKE.

We feel confident that this equipment will meet your expectations in workmanship, reliability and performance when used as designed. This manual is to assist you with the safe operation of your REIST ROTO-RAKE. It also has a parts list to help you when replacement parts are required. Any person who will be assembling, attaching, maintaining, or operating this product and the prime mover to which it is attached, are required to read and completely understand the information and instructions contained in this manual and that of the prime mover. Always obtain further assistance by contacting the dealer from which this product was purchased or by contacting REIST Industries at the telephone number or address below. Keep this manual available for reference whenever this product is being handled or used and we recommend that it is reviewed periodically and before seasonal use. Provide this manual to any new owners and/or operators and ensure they fully understand the safe operation of this equipment before it is placed in service.

Replacement copies of this manual are available for downloading at:
www.reistindustries.com

Innovation Working for You

REIST Industries Inc.

100 Union Street
Elmira, Ontario, Canada
N3B 3L7

Phone: 519-669-1501
Toll Free: 1-877-467-3478

The illustrations and information contained within this manual were current at the time of publication. Under our policy of continuous improvement, we reserve the right to change specifications and designs without prior notice. The illustrations do not necessarily show the standard version of product offered by REIST Industries.

PRODUCT CONFIGURATION

To ensure that the ROTO-RAKE is matched to the right prime mover, REIST ROTO-RAKE models are as follows:

ROTO-RAKE

Model	Working Width	GPM	Max PSI	Mount	Pounds	Kilograms
RR96	96"	18 to 35	3000	Skid Steer	1350	615

With optional Valve Manifold add 120 lbs (55 kg)



WARNING!

Exceeding the recommended specifications can result in damage to the equipment and will void all REIST Industries warranties.

The following references are used throughout this Operator's and Parts Manual:

Attachment, Implement	Refers to the ROTO-RAKE whether attached or separate from the prime mover
Prime Mover	The engine-driven machine to which this product is attached
Equipment	Refers to the Implement and or prime mover whether separate or connected
WARNING, DANGER, IMPORTANT	A notice that relates to the safe and efficient operation of the ROTO-RAKE or prime mover. Read and understand the reference before attaching or operating the ROTO-RAKE or the prime mover.

GENERAL SAFETY PRECAUTIONS

Careful operation is the best assurance against accidents. It is the owner's responsibility to make sure that all operators read and understand this manual and follow the recommendations, cautions and warnings before connecting to a prime mover and operating the equipment. The REIST ROTO-RAKE was designed for use to grade and level all types of soil including stone dust, gravel or similar products.

Familiarize yourself with all controls and know how to quickly stop the equipment and all rotating parts in the case of an emergency.

Never let an untrained person or a child operate equipment.



WARNING!

DO NOT MODIFY THE ROTO-RAKE OR PRIME MOVER

Modifications may weaken the integrity of the ROTO-RAKE and may impair the operation, safety, and performance of the product. When making repairs, only qualified technicians using the manufacturer's genuine parts, following authorized instructions, shall attempt the repair. Never modify any ROPS (Roll Over Protection Structure) or FOPS (Falling Object Protective Structure) equipment or other safety device or remove guarding. Any modifications must be sanctioned in writing by an authorized representative of the manufacturer.



WARNING!

MAINTAIN AND REPAIR EQUIPMENT SAFELY

- Do not wear loose clothing, or any accessories that can catch in moving parts
- If you have long hair, cover or secure it so that it does not become entangled in the equipment
- Work on a level surface in a well-lit area.
- Always lower raised equipment to the ground or securely support it to prevent unintentional movement
- Remove and retain the prime mover's ignition key
- Use the correct tool for the job at hand. Make sure they are in good condition for the task required
- Wear the protective equipment specified by the tool manufacturer
- Use care when working on hydraulic systems and understand how to check for and release trapped hydraulic pressure


GENERAL SAFETY PRECAUTIONS



WARNING!

STAY CLEAR OF ROTATING OBJECTS

Keep hands, feet and clothing away from power driven rotating parts.

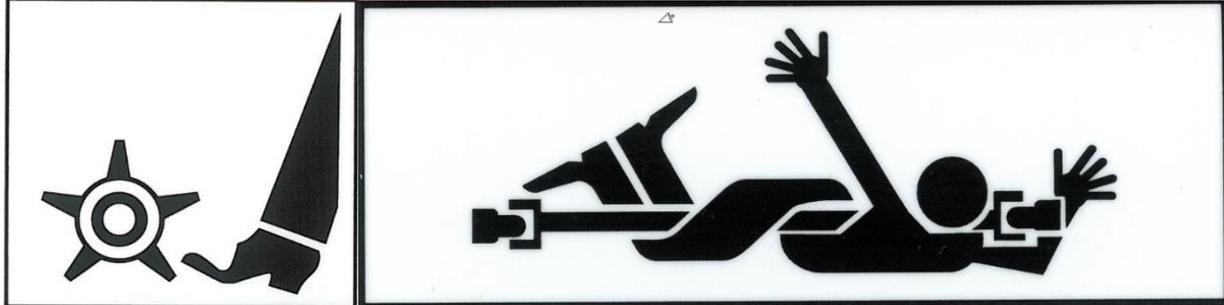

Never use your hands to clear if clogged. Never allow anyone to reach into the rotor housing. The rotor can crush and/or dismember. Keep everyone clear of the rotor until the prime mover engine is off and the hydraulic pressure has been relieved.



WARNING!

READ OPERATOR'S MANUAL BEFORE OPERATING

Do not operate equipment until you are completely trained by a qualified operator in how to use the controls, understand the machine's capabilities, dimensions, and all safety requirements. Refer to your operator's manual for these instructions.

- Do not operate an engine in confined or non-ventilated area
- Do not perform adjustments or repairs with the engine running
- Always lower raised equipment to the ground or securely support it to prevent unintentional movement
- Do not operate on excessive inclines or side slopes – know the limitations of the prime mover – be careful when turning on slopes as a rollover condition may exist
- Never carry passengers
- Keep bystanders away from the machine when in operation
- Be aware of pedestrians
- Know how to quickly stop the equipment and all rotating parts in the case of an emergency
- Stop the prime mover, lower implements and turn off the engine before dismounting
- Refer to the prime mover's Operator's Manual for additional information

OPERATION AND TRANSPORTATION ON PUBLIC ROADS AND AREAS

Always adhere to the local laws and regulations concerning traveling or operating on public roadways and areas. Clean all lights, reflectors and mirrors ensuring that all lighting is in working order before moving. Know the area! i.e. Elevations, steep side drop offs. Watch out for pedestrians and use caution when approaching pedestrians, hazardous objects (stones, etc.) may inadvertently be discharged. Always be alert while transporting or operating the equipment. Select a safe ground speed when transporting from one area to another. When operating, or driving on roadways, travel in such a way that faster moving vehicles may pass you safely.

SAFETY DECALS

Contact REIST Industries if replacement safety signs are required.

DECAL PART NUMBERS

Item	Part Number	Description
	RD106	REIST Decal

	RD115	Made in Canada Decal
---	-------	----------------------

	RD132	Roto Rake Decal
---	-------	-----------------

	RD155	RR96 Decal
---	-------	------------

	Serial	Serial Number Decal
---	--------	---------------------

	WD111	WARNING Rotating Knives & Spikes
---	-------	----------------------------------

	WD112	WARNING Read Manual Decal
---	-------	---------------------------

SAFETY DECALS . . . cont'd

Contact REIST Industries if replacement safety signs are required.

DECAL PART NUMBERS

Item	Part Number	Description
	WD115	WARNING Pinch Point Decal
	WD116	WARNING Flying Objects Decal

MAINTENANCE

Refer to the General Safety Precautions, page 5 of this manual before performing any maintenance.

1. Always ensure the ROTO-RAKE is properly installed, the prime mover is positioned on a level surface with the park brake set and the ROTO-RAKE positioned on the ground
2. Shut-off the engine and remove and retain the ignition key
3. Chock the wheels to prevent movement and release residual hydraulic pressure
4. Grease hinge points every 50 hrs.
5. At the beginning of each season, ensure that all fasteners are properly torqued, all safety guards are in place and that operator's manual is reviewed and understood
6. At the end of season, perform all maintenance activities and protect exposed hose ends. Always check for missing or damaged parts and repair as required.

STANDARD SETUP INSTRUCTIONS

Improper installation, operation, or maintenance of this equipment could result in serious injury or death. FOLLOW ALL SAFETY INSTRUCTIONS IN THIS MANUAL AND THE PRIME MOVER'S MANUAL(S).

Refer to the operator's manual(s) for your prime mover and follow the mounting instructions contained therein.



WARNING!

STAY CLEAR OF ROTATING OBJECTS

Keep hands, feet and clothing away from power driven rotating parts.

SKID-STEER HOOKUP INSTRUCTIONS

The standard ROTO-Rake has a universal Skid Steer mount. Attach Skid steer to Roto-Rake and attach the two Hydraulic hoses. Different makes of skid steers have different wiring configurations. You need the correct wiring harness.

OPERATION OF ROTO-RAKE

- Be sure the area is clear of all bystanders
- Refer to the prime mover starting instructions
- Lower ROTO-RAKE to ground, putting skid steer arms in float position.
- For leveling control, you want the weight on the wheels of the Roto-Rake
- Tip the bucket cylinders of the skid steer until tips of rotor are at desired depth.


FLOAT SETUP INSTRUCTIONS

The ROTO-RAKE can be used in a float condition that will allow it to follow minor ground contours instead of gouging the terrain with a rigid connection. With the ratchet set so that the Roto Rake is horizontal on level ground, the operator can engage the Float feature.


FLOAT SETUP OF ROTO-RAKE

- Remove the locking hairpin from the pin holding the tilt adjuster end in the hole under the slot and pull it out.
- Raise the tilt adjuster end until the clevis hole lines up with the slot and insert the pin.
- Secure the pin in the slot with the hairpin.
- The float position allows the Roto-Rake to tilt and follow minor variations in the contours of the ground.
- The float position allows 7" of up and down movement as the Roto Rake travels across uneven ground.
- The Wheel Attachment may be left either engaged or disengaged at the discretion of the operator.


Rigid Position

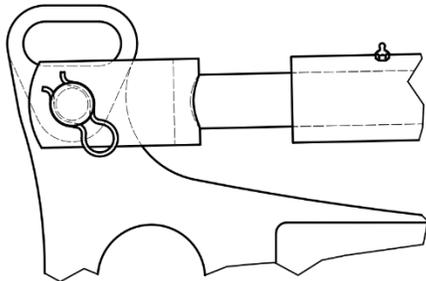

Float Position

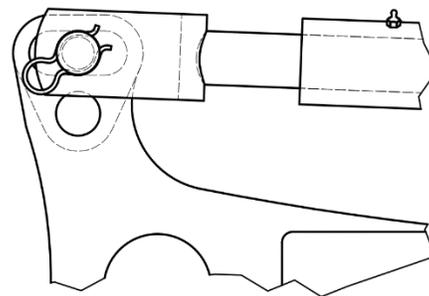


STANDARD FEATURES ASSEMBLY

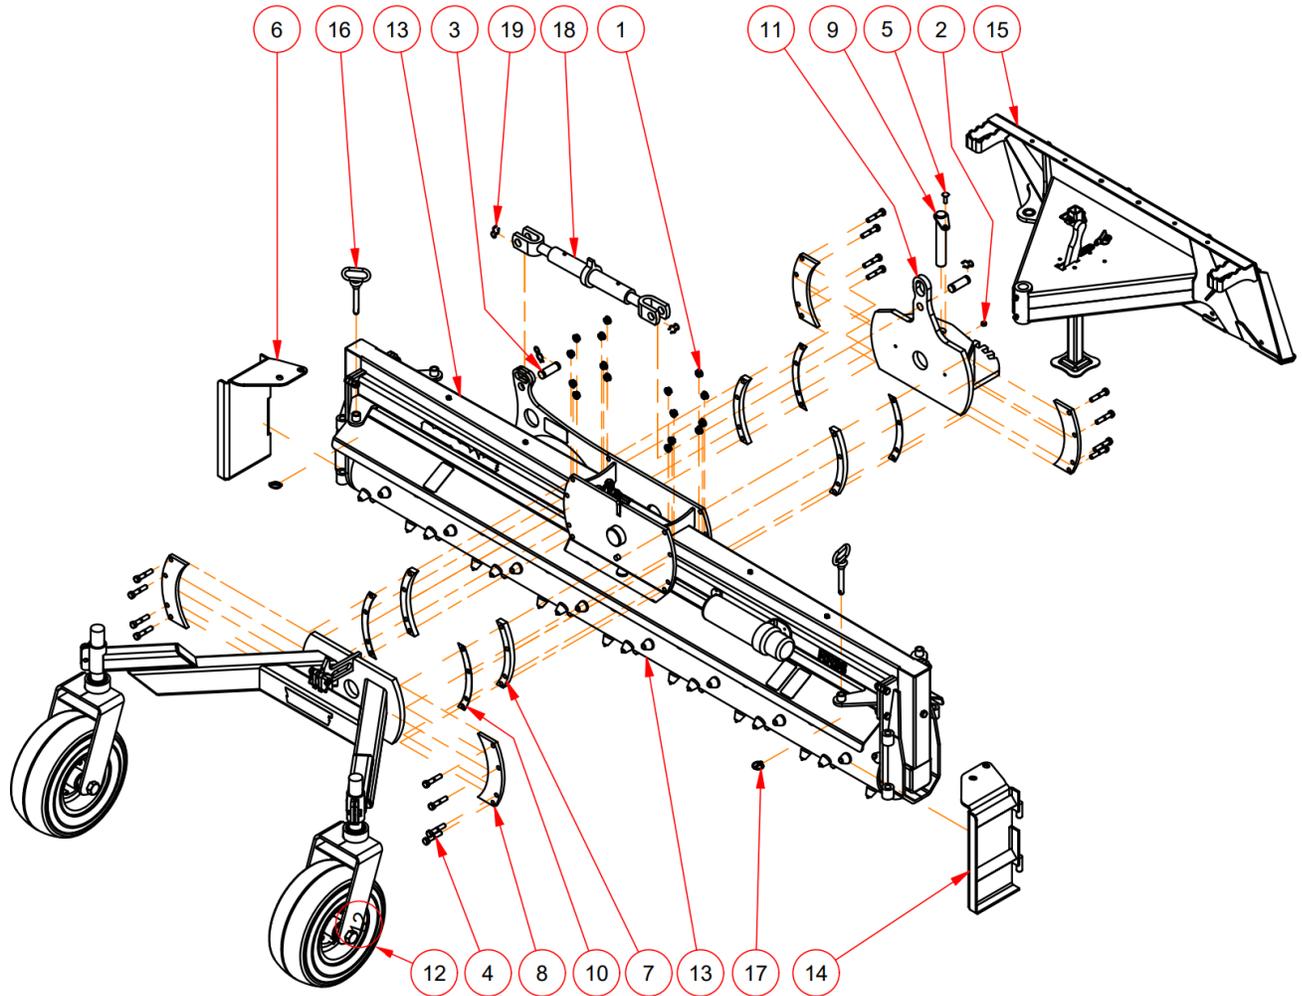


Parts List				Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION	ITEM	QTY	PART NUMBER	DESCRIPTION
1	16	12FSLN	Flange Nut	11	1	107228	Knuckle
2	1	38CLN	NC Lock Nut	12	1	107237	Wheel Attachment - RR72, RR84, & RR96
3	2	100x225	Pin - 1.00 x 2.375" (Active Length - 3.00" OA)	13	1	122250-AB	Roto Rake 96
4	16	12212	Hex Bolt	14	1	122412	Side Gate Left Assembly
5	1	38114C	Carriage Bolt	15	1	122783	15 Deg Base Swivel Frame Assembly
6	1	100183	Side Gate Assembly	16	2	384502	Draw Pin 58
7	4	103938	Spacer	17	2	385501	3/16 Lynch Pin
8	4	103939	Clamp	18	1	386501	Ratched Jack
9	1	103944	Pin	19	4	637856	Hair Pin
10	4	107166	Shim				

RR96 ROTO RAKE - ASSEMBLY

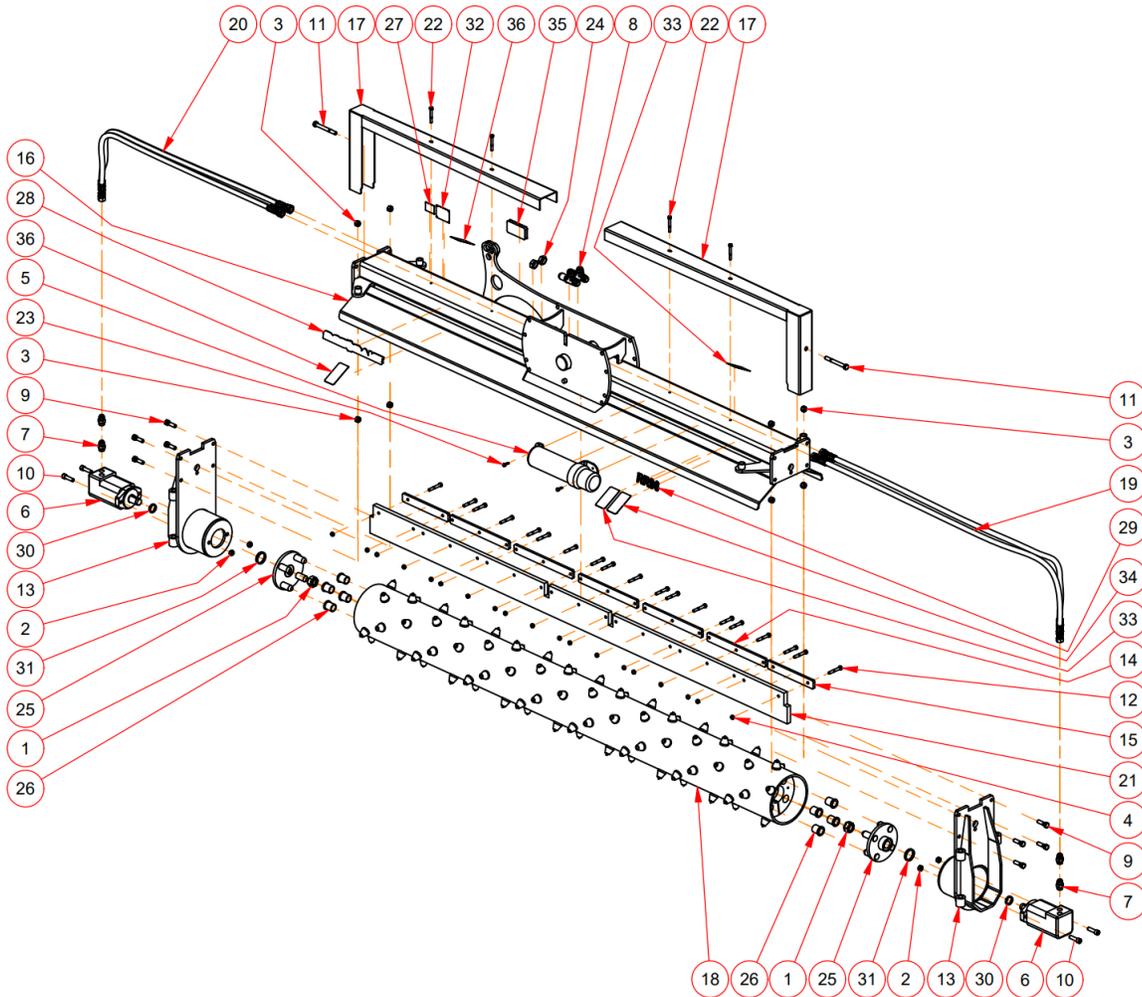


Parts List				Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION	ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	1CNF	Slotted Hex Nut	20	2	122393	Hydraulic Hose
2	4	12CLN	NC Lock Nut				H24508-08U610-08U612-53
3	8	12NLN	Nylon-Insert Locknut	21	1	125607	RR96 Rubber
4	19	38CLN	NC Lock Nut	22	4	516212	Hex Bolt
5	1	67.222.000	Manual Holder	23	2	2167121	Self Drilling 14x1 Metal Screw
6	2	104-4100-006	2000 series hyd motor 2 bolt	24	2	HN 1 116 - 12 UN JAM	Hex Jam Nut 1-1/16 - 12 UN
7	4	5315*10	Fitting	25	2	HRG04	Rotor Drive Adaptor Weldment
8	2	5726*12	JIC Bulkhead Run Tee	26	8	MF1-1620-24	Ingus bushing
9	8	12134	Hex Bolt	27	1	RD115	Made In Canada Decal
10	4	12134CSH	Socket Head	28	1	RD132	Roto-Rake Decal
11	2	12412	Hex Bolt	29	1	RD155	RR96 Decal
12	19	38212	Hex Bolt	30	2	RVA-030	Oil Seal
13	2	100175	Hyd Motor Mount	31	2	RVA-045	Oil Seal
14	5	113079	Plate	32	1	Serial	Serial # Plate
15	2	114639	Plate	33	2	WD111	Danger to Feet - Stay Clear of Front Decal
16	1	122245-AB	Roto Rake Frame Weldment 96	34	1	WD112	WARNING - Read Manual Decal
17	2	122271	Hose Shield Side 96	35	2	WD115	WARNING Pinch Point Decal
18	1	122300	Rotor 96	36	2	WD116	WARNING Flying Object Decal
19	2	122387	Hydraulic Hose H24508-08U610-08U612-63				

RR96 WHEEL ASSEMBLY

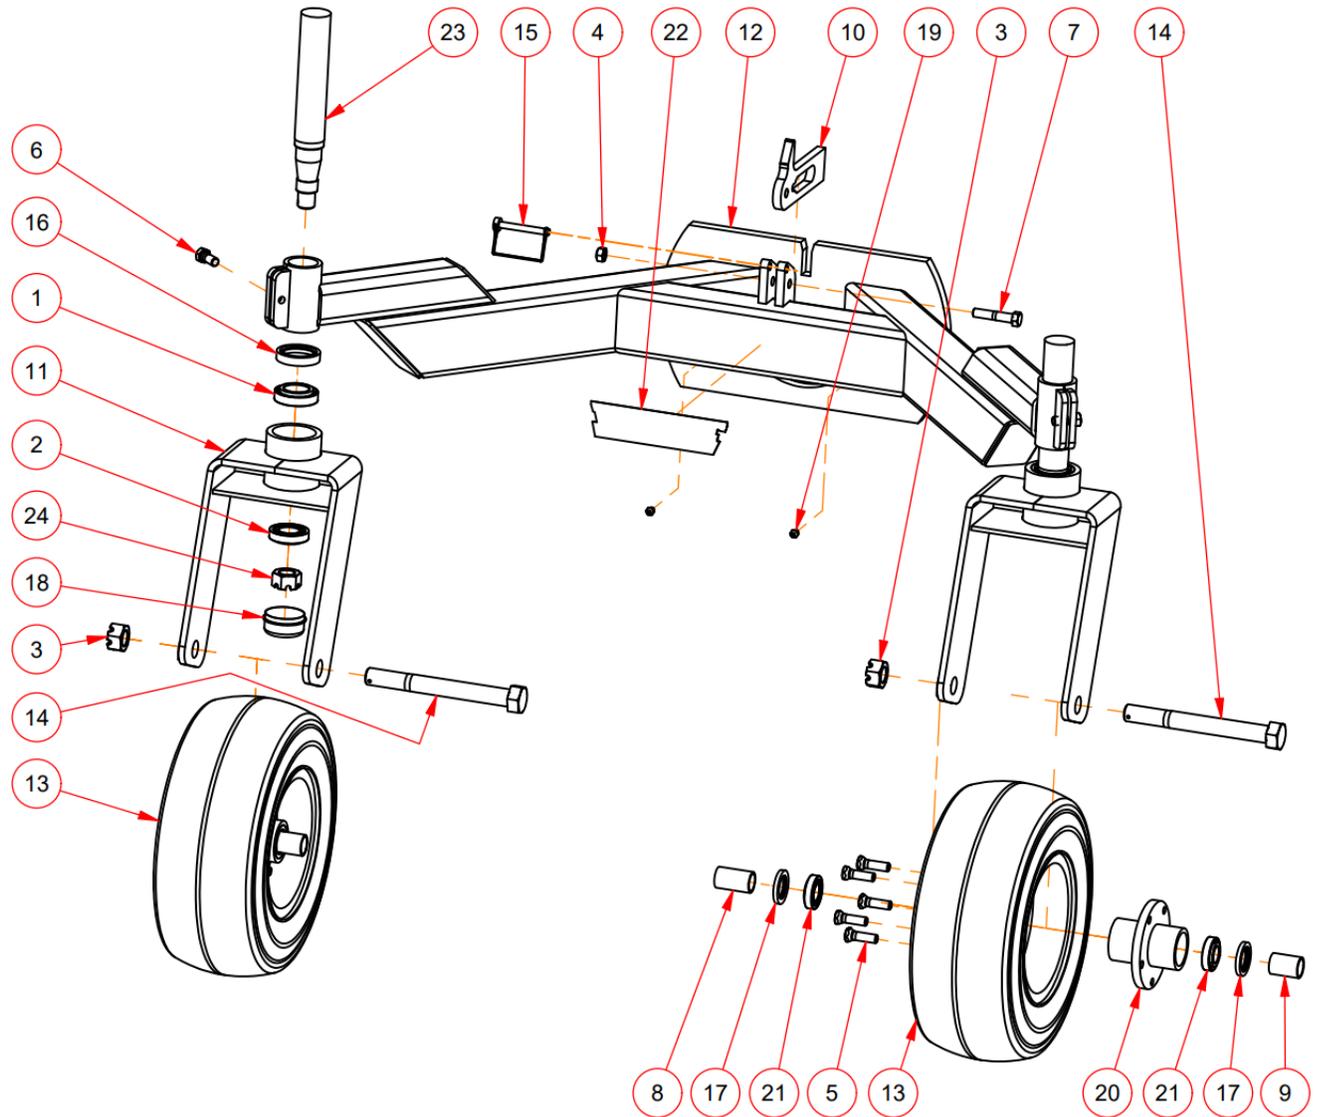

Parts List				Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION	ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	1.5 x 2.5625 x 0.71 - LM29749 LM29710X	Tapered Roller Bearing	12	1	107235	Wheel Attachment Frame
2	2	1.25 x 2.328 x 0.625 - LM67045 LM67010	Tapered Roller Bearing	13	2	108110	Wheel 16.5x8 5 on 4.5
3	2	1CNF	Castle Hex Nut	14	2	117443	1-9NF BP Hex Bolt w 3/16 Hole
4	1	12CLN	NC Lock Nut	15	1	387113	Pin
5	10	500-20	Wheel bolt Bolt	16	2	CR17415	SEAL
6	2	12114	Hex Bolt	17	4	CR523696	Seal
7	1	12212	Hex Bolt	18	1	D4000	Dust Cap
8	2	107106	Spacer L	19	2	GF	1/8 NPT ST Zerk
9	2	107107	Spacer S	20	2	H010005450	Hub
10	1	107229	Locking Plate	21	4	L44643 L44610	Tapered Roller Bearing
11	2	107233	Swivel Wheel Weldment	22	1	RD106	Reist Decal
				23	2	S04000175-1200	Spindle
				24	2	SJ-114	Slotted Hex Nut


STANDARD 15 DEGREE SWIVEL FRAME ASSEMBLY

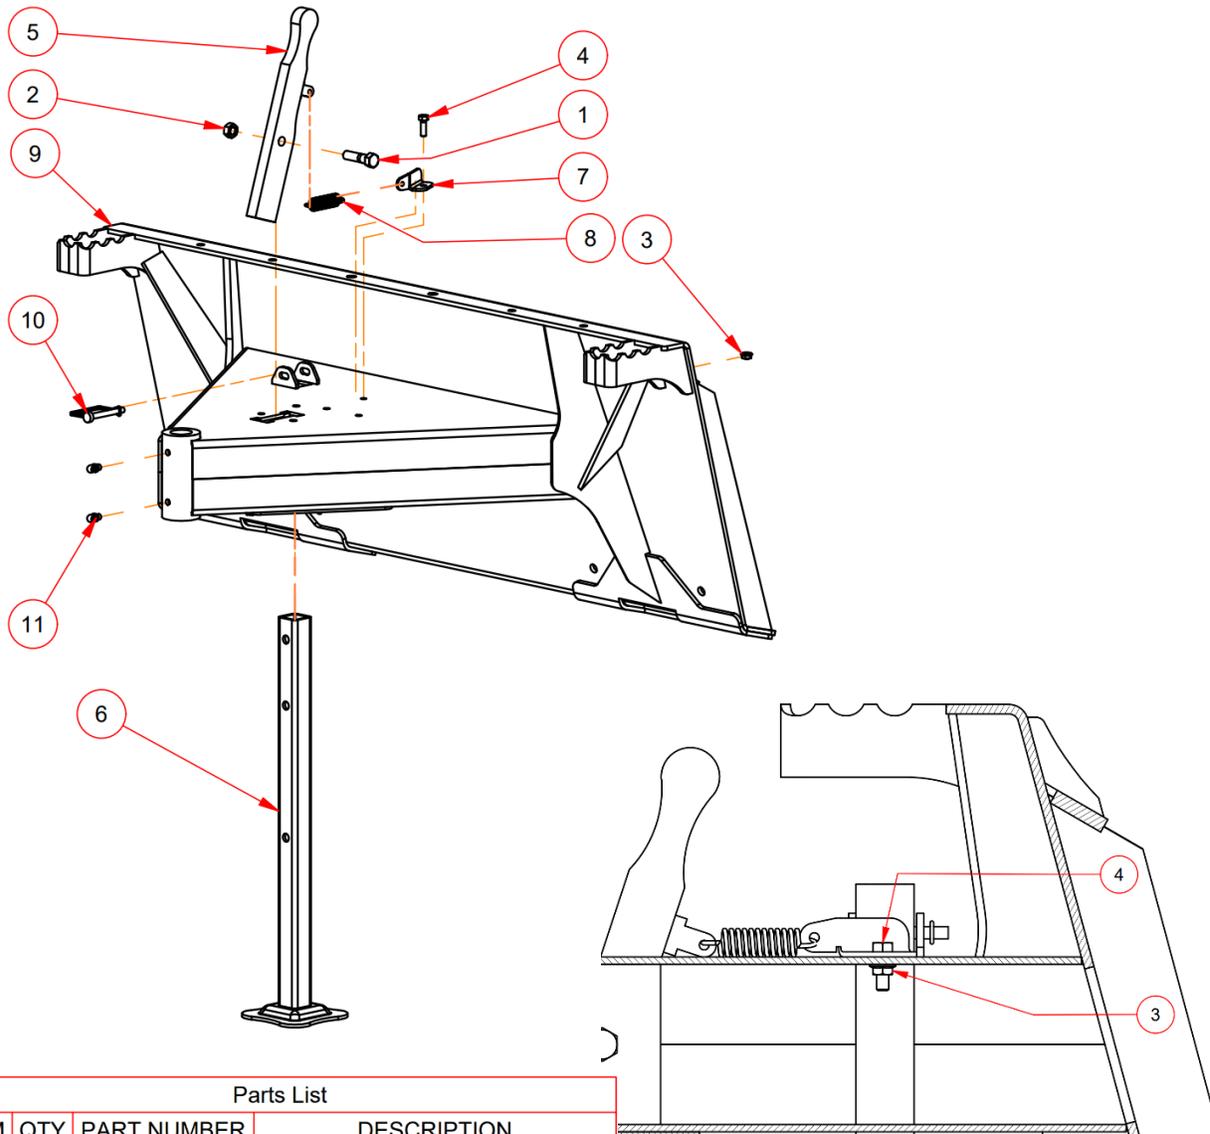

Parts List


ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	12*2	Hex Bolt
2	1	12CLN	NC Lock Nut
3	1	516FSLN	Flange Nut
4	1	5161	Hex Bolt
5	1	100185	Roto Rake Swivel Lock Lever
6	1	100186	Roto Rake Swivel Frame Stand
7	1	110666	Spring Bracket
8	1	117250	Extension Spring E1905-267-0635
9	1	121597	15 Deg Swivel Frame Weldment
10	1	387109	Lock Pin
11	2	GF	1/8 NPT 90deg Zerk

BASE UNIT & HITCH ASSEMBLY

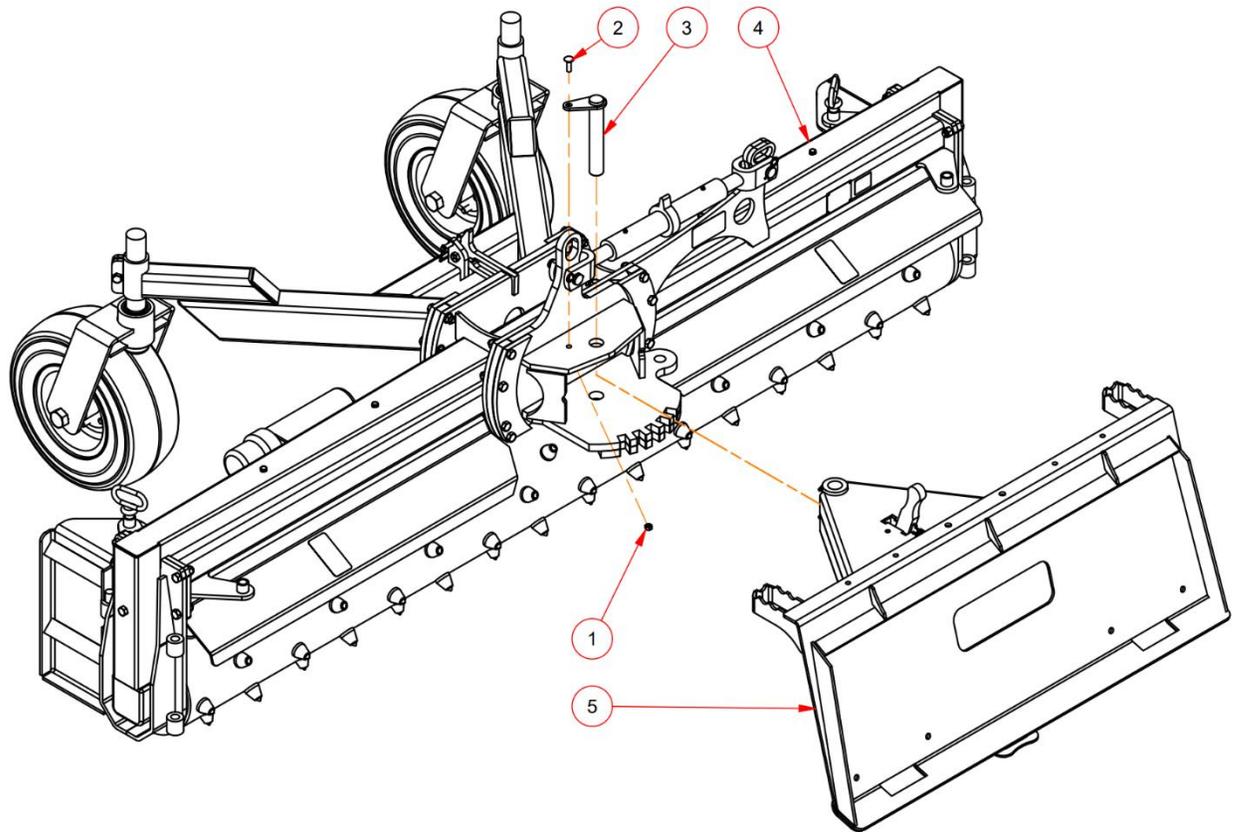


Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	38CLN	NC Lock Nut
2	1	38114C	Carriage Bolt
3	1	103944	Pin
4	1	122250-AB	Roto Rake 96
5	1	122783	15 Deg Base Swivel Frame Assembly

OPTIONAL ON THE FLY HYDRAULIC VALVE BLOCK

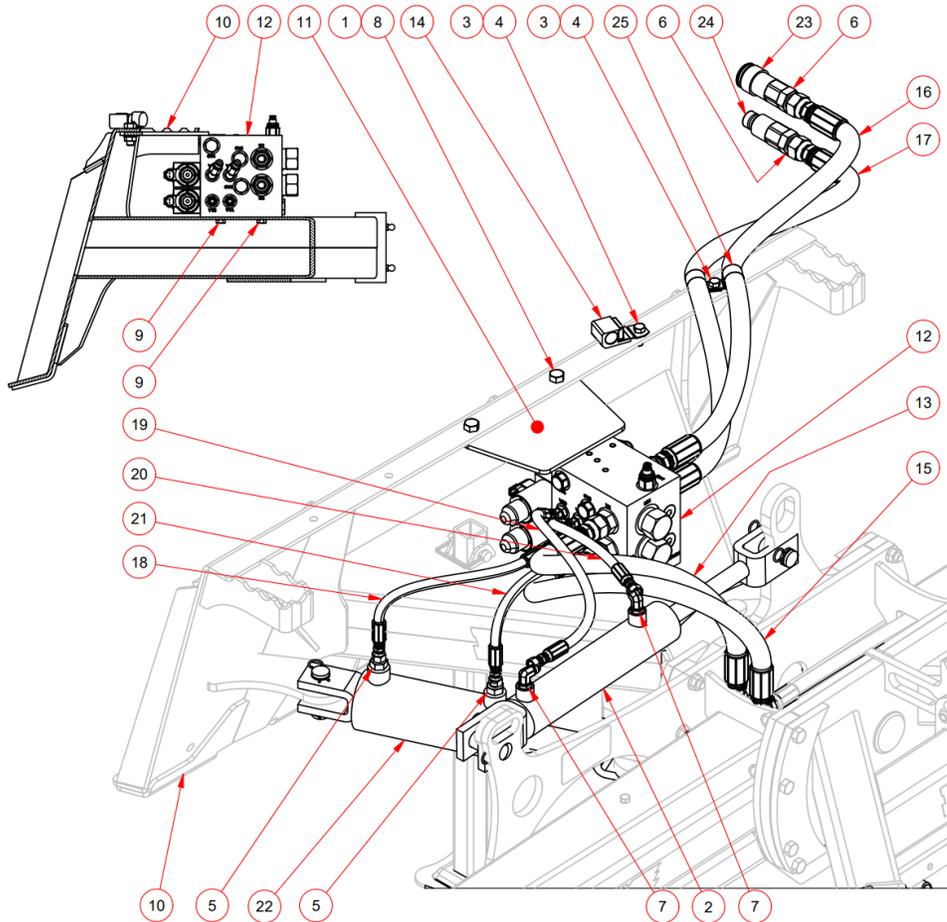


Parts List				Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION	ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	12FSLN	Flange Nut	16	1	123598	Hydraulic Hose H145512-12U612-12U672-34
2	1	20FEM08-NW	Cylinder	17	1	123600	Hydraulic Hose H145512-12U612-12U672-34
3	2	38CLN	NC Lock Nut	18	1	123604	Hydraulic Hose H24504-04U606-04U666-16
4	2	381	Hex Bolt	19	1	123606	Hydraulic Hose H24504-04U606-04U666-25
5	2	5315*6*8	Fitting	20	1	123608	Hydraulic Hose H24504-04U606-04U666-17
6	6	5315*12	Fitting	21	1	123610	Hydraulic Hose H24504-04U606-04U666-14
7	2	5515*6	90 Elbow Fitting	22	1	CL3006-S	3x6 Clevis Cylinder
8	2	12114	Hex Bolt	23	1	FEM501-12FO	Female Flat Face Coupler
9	2	38114	Hex Bolt	24	1	FEM502-12FO	Male Flat Face Coupler
10	1	121746	15 Deg Hyd Swivel Frame Assembly	25	2	HK1713	1" HoseClamp
11	1	121898	Guard Plate				
12	1	123247	ROTORAKE F Valve Block				
13	1	123427	Hydraulic Hose H145512-12U612-12U672-26				
14	1	123584	RR Clamp				
15	1	123596	Hydraulic Hose H145512-12U612-12U672-30				

OPTIONAL HYDRAULIC VALVE BLOCK DETAILS

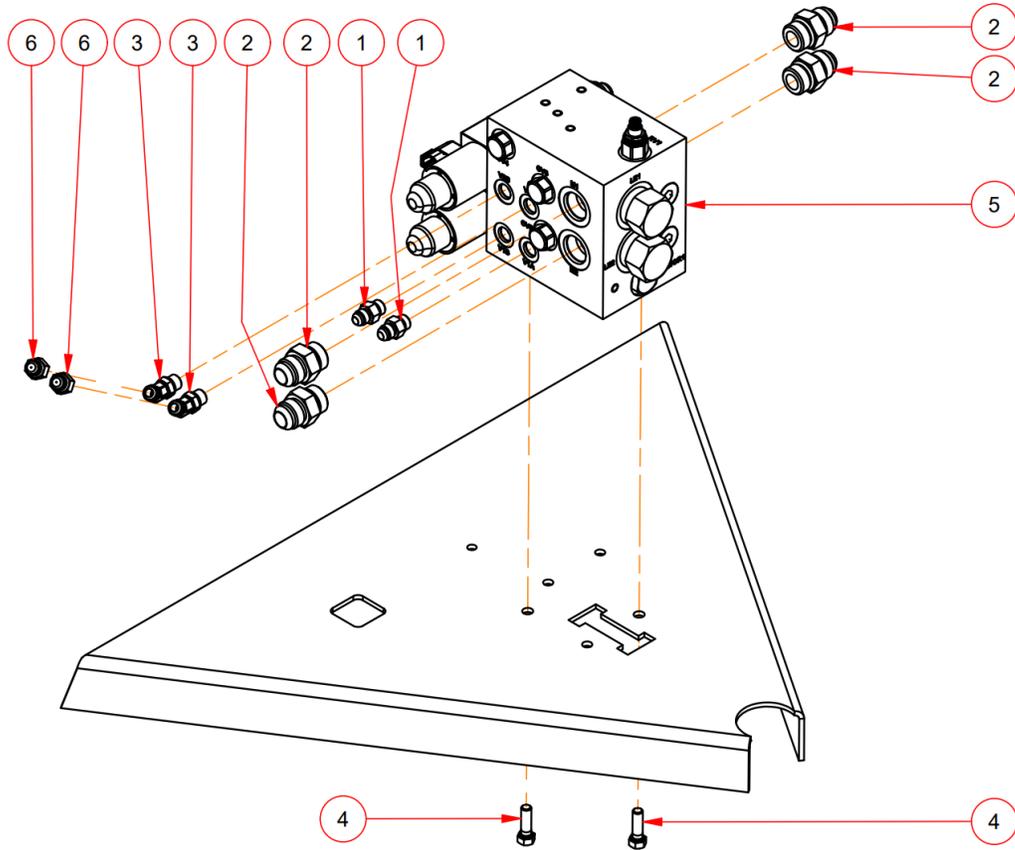


Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	5315*6	Fitting
2	4	5315*12	Fitting
3	2	5365*6	45 Elbow JIC/Straight
4	2	38114	Hex Bolt
5	1	123247	ROTORAKE F Valve Block
6	2	RES5100	0606-032 Restrictor Fitting

OPTIONAL HYDRAULIC VALVE BLOCK DETAILS

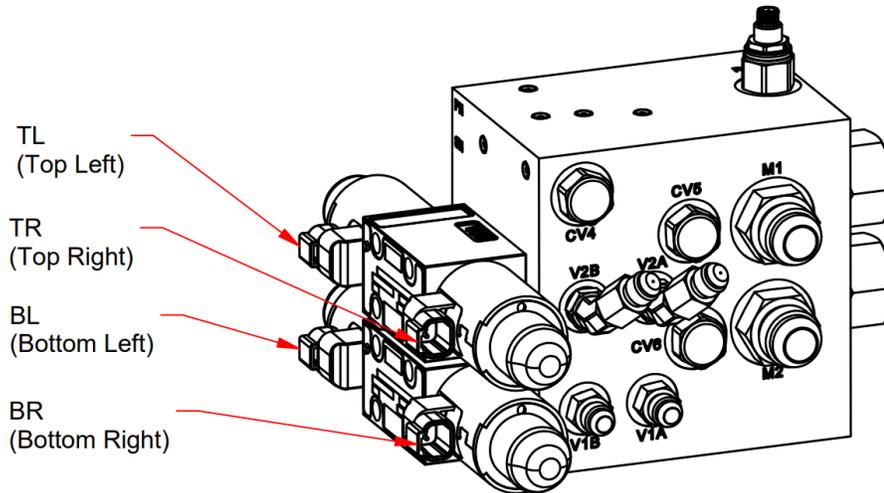



Solenoid operates Port		RotoRake Reaction
Top Right	V2A	Tilt Clock Wise
Top Left	V2B	Tilt Counter Clock Wise
Bottom Left	V1B	Angle Right
Bottom Right	V1A	Angle Left

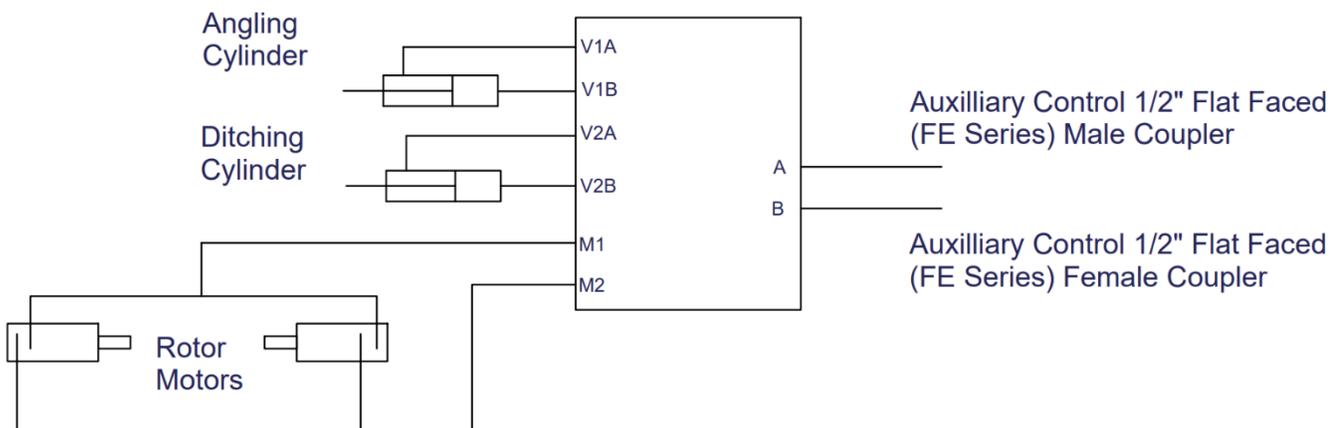

OPTIONAL VALVE BLOCK WIRING HARNESSSES


Use wiring harnesses starting with part number EWKV#### to connect the Valve Manifold to the prime mover.

Harness ID	Number of Pins	MFG	PLUG LOCATION ON VALVE			
			Top Left - CCW	Top Right - CW	Bottom Left - Angle Right	Bottom Right - Angle Left
EWKV14BO	14	BOBCAT	C2B	C2A	C1B	C1A
EWKV14CAT	14	CAT	C2B	C2A	C1B	C1A
	14	KUBOTA				
	14	NEW HOLLAND				
	14	JCB	C1B	C1A	C2B	C2A
		GEHL				
		VOVLO				
		YANMAR				
MUSTANG						
14	TAKEUCHI	C2A	C2B	C1B	C1A	
EWKV14CNH	14	CASE	C2B	C2A	C1B	C1A
EWKV14WN	14	WACKER	C2B	C2A	C1B	C1A
EWKV14JD	14	JOHN DEERE	C2B	C2A	C1B	C1A
EWKV8ASV	8	ASV	C2B	C2A	C1B	C1A
		TEREX				
EWKV8CAT		CAT				
EWKV7BO	7	BOBCAT	C2B	C2A	C1B	C1A
RRMTSV01	N/A	Manual Toggle	C2B	C2A	C1B	C1A

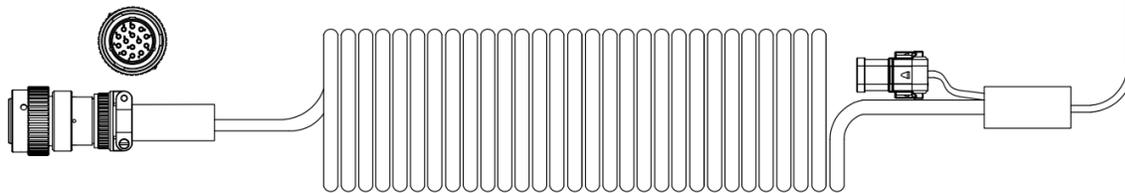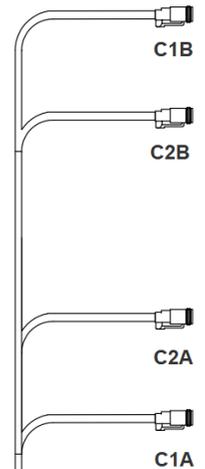


Showing 14 Pin Plug

OPTIONAL DIVERTOR VALVE

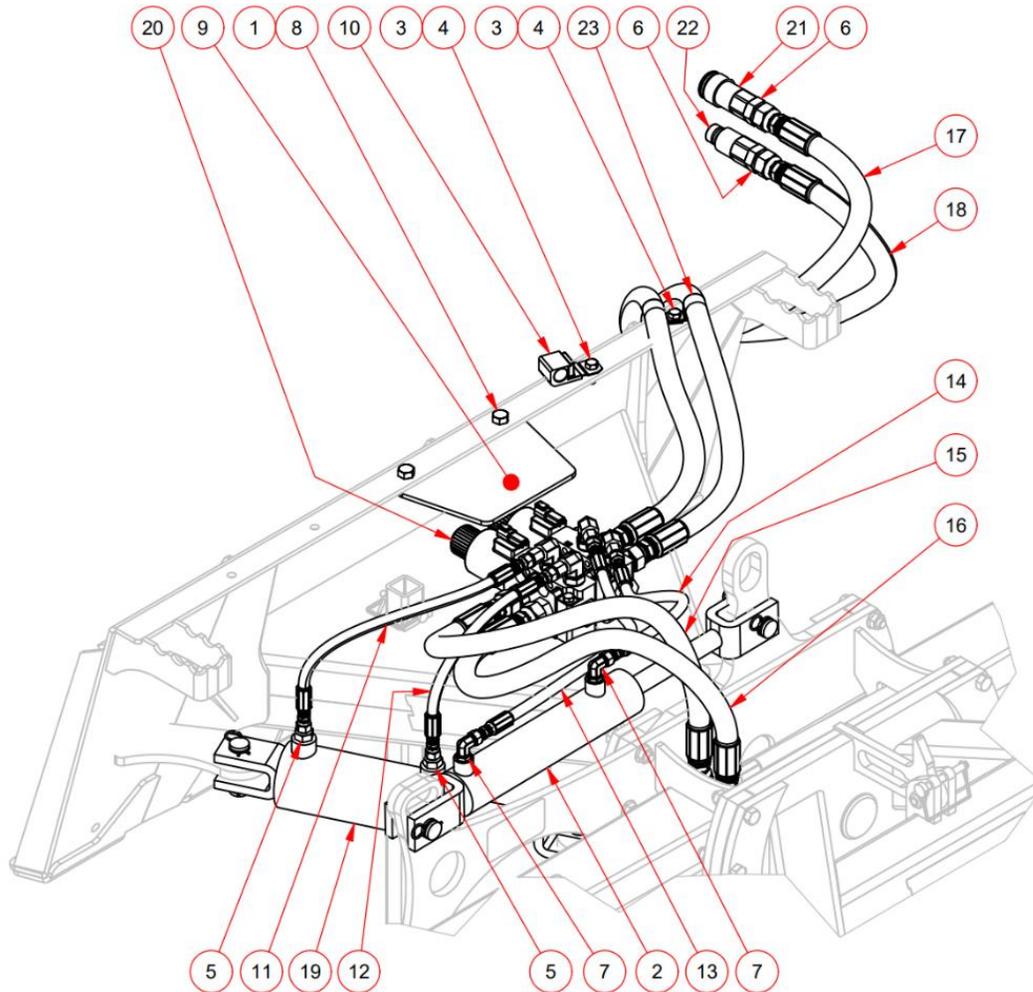


Parts List				Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION	ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	12FSLN	Flange Nut	14	1	124671	Hydraulic Hose H24504-04U606-04U666-20
2	1	20FEM08-NW	Cylinder	15	1.00	124674	Hydraulic Hose H145512-12U612-12U672-28
3	2	38CLN	NC Lock Nut	16	1.00	124677	Hydraulic Hose H145512-12U612-12U672-29
4	2	381	Hex Bolt	17	1.00	124680	Hydraulic Hose H145512-12U612-12U672-32
5	2	5315*6*8	Fitting	18	1.00	124682	Hydraulic Hose H145512-12U612-12U672-32
6	2	5315*12	Fitting	19	1	CL3006-S	3x6 Clevis Cylinder
7	2	5515*6	90 Elbow Fitting	20	1	DFE140-6	Walvoil 6 Way Solenoid Control Sectional Diverter Valve
8	2	12114	Hex Bolt	21	1	FEM501-12F0	Female Flat Face Coupler
9	1	121898	Guard Plate	22	1	FEM502-12FO	Male Flat Face Coupler
10	1	123584	RR Clamp	23	2	HK1713	1 "HoseClamp
11	1.00 0 in	124657	Hydraulic Hose H24504-04U606-04U666-18				
12	1.00 0 in	124663	Hydraulic Hose H24504-04U606-04U666-15				
13	1.00 0 in	124665	Hydraulic Hose H24504-04U606-04U666-28				

OPTIONAL DIVERTOR VALVE ASSEMBLY DETAILS

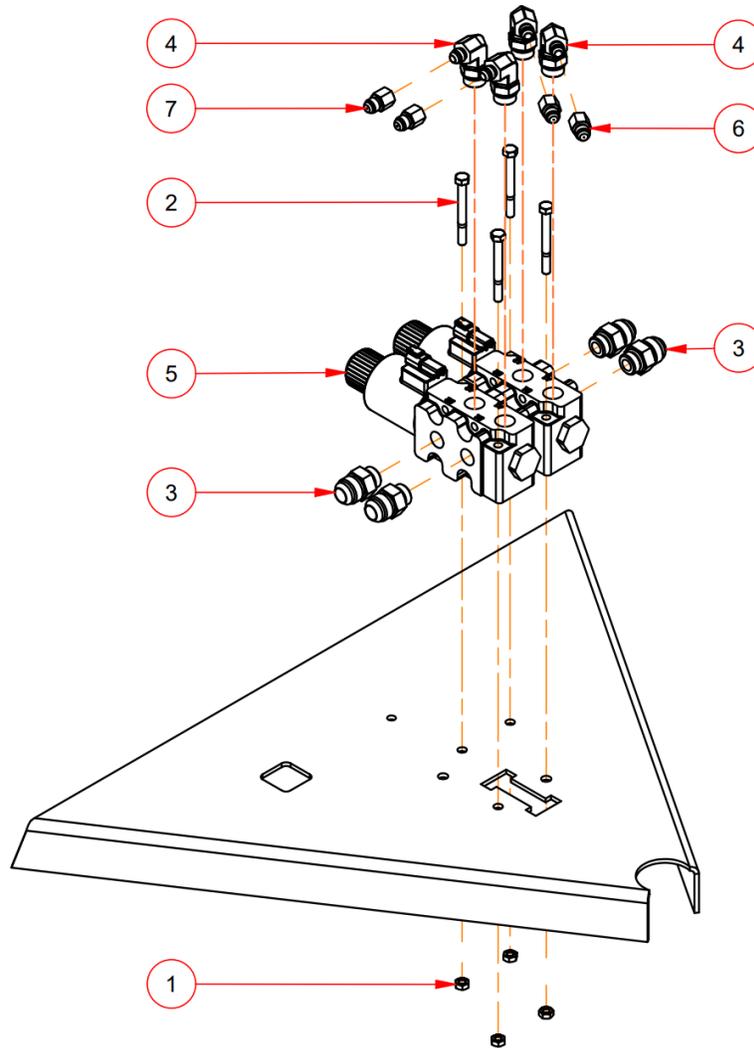

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	4	516CLN	NC Lock Nut
2	4	5163	Hex Bolt
3	4	5315*12*10	Fitting
4	4	5515*6*10	90 Elbow Fitting
5	1	DFE 140-8B	Walvoil 6 Way Solenoid Control Sectional Diverter Valve
6	2	RES5100	0606-032 Restrictor Fitting
7	2	RES5105	0606-063-Restrictor Fitting

OPTIONAL DIVERTOR VALVE DETAILS & SCHEMATIC

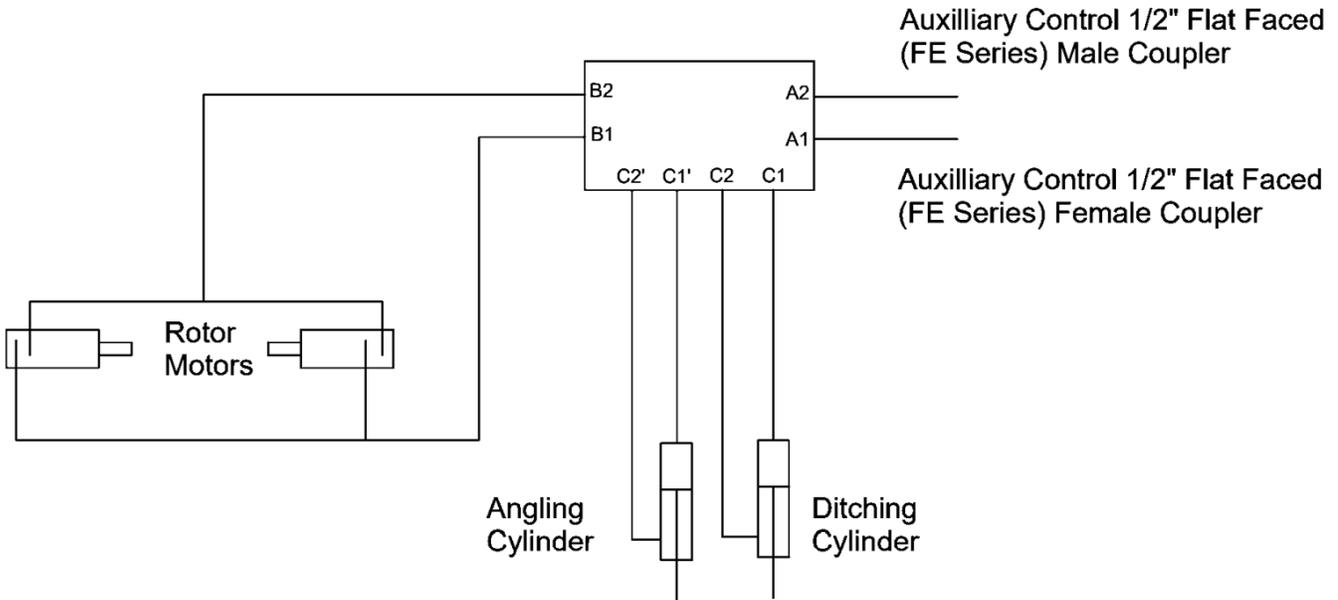


WIRING HARNESSES


Use wiring harnesses starting with part number EWKD#### to connect the Walvoil 6 Way Solenoid Control Sectional Divertor Valve to the prime mover.

Divertor Wiring Harnesses	
Part Number	Description
EWKD14BO	Bobcat Skidsteers 14 Pin Wiring Kit (Deutsch Plug)
EWKD14CAT	Caterpillar & Gehl Skidsteers 14 Pin Wiring Kit (Deutsch Plug)
EWKD14CNH	Case & New Holland Skidsteers 14 Pin Wiring Kit (Deutsch Plug)
EWKD14JCB	JCB & Volvo Skidsteers 14 Pin Wiring Kit (Deutsch Plug)
EWKD14JD	John Deere 244J Loader & John Deere Skidsteers 14 Pin Wiring Kit (Deutsch Plug)
EWKD14KU	Kubota & Wacker Neuson Skidsteers 14 Pin Wiring Kit Deutsch Plug)
EWKD14TA	Takeuchi Skidsteers 14 Pin Wiring Kit (Deutsch Plug)
EWKD7BO	Bobcat Skidsteers 7 Pin Wiring Kit (Deutsch Plug)

Use the wired remote manual toggle switch (part number RRMTS01) to operate the divertor valve from the prime mover.

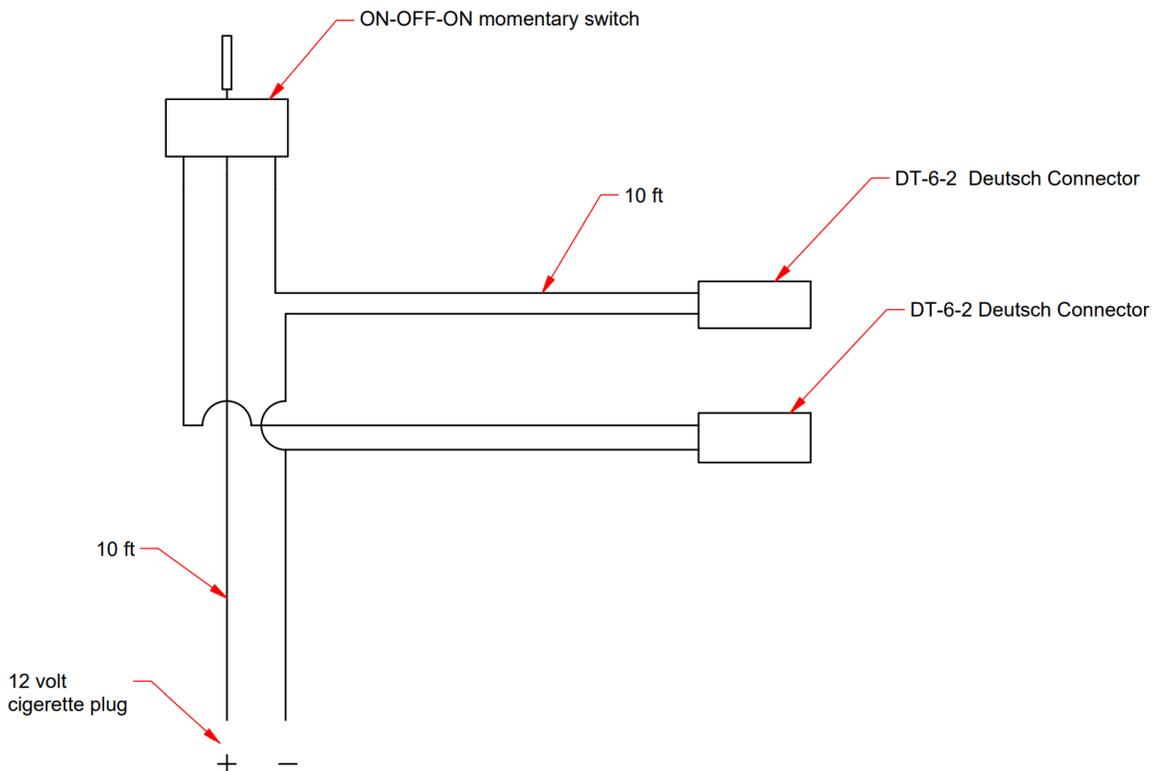



OPTIONAL SIDE CUTTERS - RRSCK

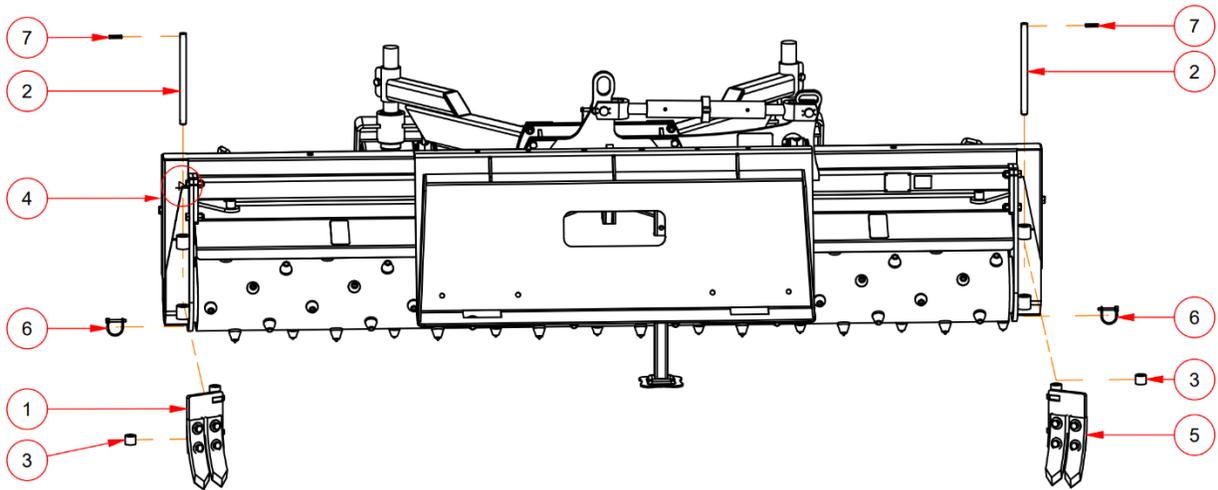

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	100192	Plow Attachment
2	2	100193	Pin
3	2	120359	Spacer Bushing
4	1	122250-AB	Roto Rake 96
5	1	123311	Plow Attachment Left
6	2	387104	Snapper Pin 1/4 x 1-3/8
7	2	516112RP	Roll Pin

Note: Item #3 120359-Spacer Bushing can be placed above or below the Plow Attachments depending on the depth of cut desired.
Side gates and optional side cutters can be exchanged depending on direction of travel.

OPTIONAL PLOW ATTACHMENT ASSEMBLY

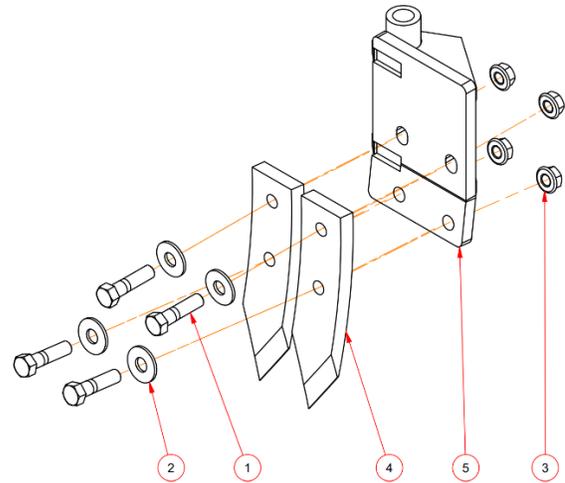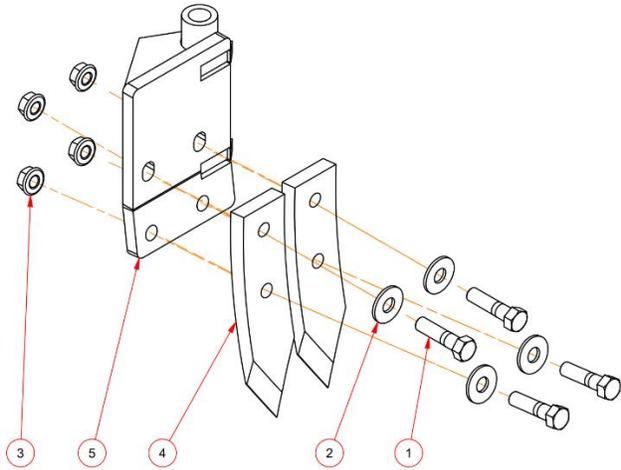

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	4	12*2	Hex Bolt
2	4	12F	Flat Washer
3	4	12FSLN	Flange Nut
4	2	1009	5/8x2 Spike Tooth
5	1	104898	Plow Weldment

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	4	12*2	Hex Bolt
2	4	12F	Flat Washer
3	4	12FSLN	Flange Nut
4	2	1009	5/8x2 Spike Tooth
5	1	123310	Plow Weldment Left

WARRANTY INFORMATION

All new REIST machinery is warranted to be free from defects in material or workmanship, which may cause failure under normal usage and service when used for the purpose intended for a period of 12 months. This warranty applies only to a new REIST product, there being no warranty of any nature in respect to new products that have been modified or altered, repaired, neglected, or used in any way, which, in the opinion of REIST adversely affects its performance.

In the event of failure of a part or parts, and upon inspection, REIST is satisfied that failure is due to defective material or workmanship within 12 calendar months from the date of delivery to an end user, such defective part or parts will be repaired or replaced by REIST Industries Inc. It is the responsibility of the buyer, at his expense, to transport the machine or equipment to the manufacturer service shop or to an authorized service depot or, alternatively, to reimburse REIST for any travel or transportation expense involved in fulfilling this warranty.

When requested by REIST, part or parts shall be returned for inspection, transportation prepaid, to a place designated by REIST. IN NO EVENT SHALL THE BUYER BE ENTITLED TO RECOVER FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING, BUT NOT LIMITED TO, LOSS OF PRODUCT, INCONVENIENCE, RENTAL OR REPLACEMENT EQUIPMENT, LOSS OF PROFIT, OR OTHER COMMERCIAL LOSS.

This warranty becomes void and null if the equipment is modified, breaks down as the result of an accident, is not operated according to manufacturer's recommendations, damaged by negligence or if maintenance has not been carried out as specified.

THIS WARRANTY IS NOT TRANSFERABLE

REIST Industries Inc.
100 Union Street
Elmira, Ontario, Canada
N3B 3L7